



MAS⁺

Extreme



MAIN PRINTER UNITS

Unwinder:

- axial unwinder unit for A frame big roll diameter up to 2000 mm with dancing roller for printer's synchronization and centering unit for web alignment. (A frame is not included)
- axial driven unwinder with expanding shaft (3"- 74 mm core) for roll with a diameter up to 500 mm.
- Managed by compensation roll with pneumatic actuators, web tension is controlled by pressure regulator.

Feeding transport belt:

- TPU printing belt glued for web transport driven by harmonic gearbox
- Doctor blade for the glue coating operation

Printing bridge:

- Two printing bridges with carriage driven by linear motor
- Max printing height 20 mm
- Print heads cleaning station, each color is selectable individually, process operated from panel operator
- Capping station for carriage storage during printing pause

Washing unit:

- Stainless steel unit composed by 2 driven brushes and 2 rubber squeegees
- The unit can be removed for ordinary maintenance by a beneath trolley

Pressure roll:

- Heated pressure roll Fluor polymeric coated for the correct web sticking on the transport belt
- The unit movement is synchronized with belt feeding
- Temperature set is adjustable from control panel

Ink refueling system:

- 25 l inks tank with ink min. level monitoring
- Refueling can be done also during printing process



Print width: Min: 1900 mm - Max: 3400 mm

Type of heads: Kyocera KJ4B 600 dpi heads

N° of carriage: 1

Heads per carriage: Up to 120 (10 rows of 12)

Installable colors: Nr. min 4 – max 12

Image processor: Built in

Power Supply: 400 V

Installed power: 60 kVA



Pneumatic utility: 6 bar,
max consumption: 345 l / min

Water utility: 3 bar, max consumption 400 l/h

Demineralized water: max consumption 0,1 l/h

Weight: 10.500 kg

PRINTER LAYOUT

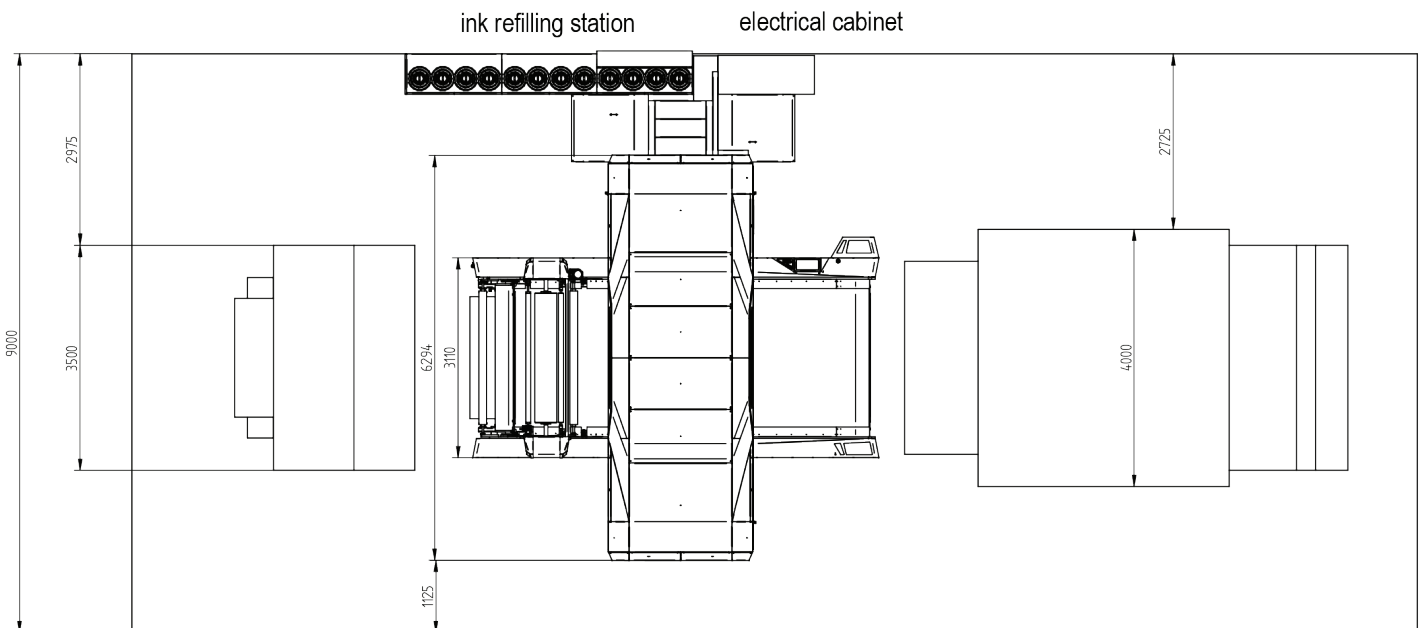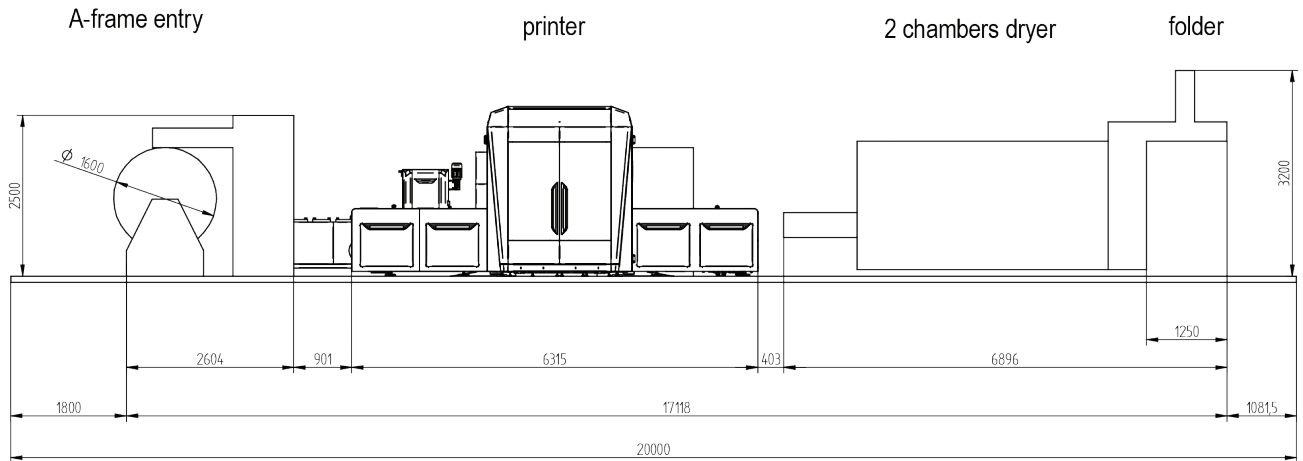

one brand solutions

- T: +32 2 42 04 129
- M: +32 484 142 282
- sales@1brandsolutions.be
- Leuvensesteenweg 510, Building 11
- 1930 Zaventem, Belgium